

CCTV, Coaxial 라인 보호용 서지보호장치


P8AX



● **P8AX series**

- 감쇄율 : < 0.2 dB
- VSWR (Voltage Standing Wave Ratio) : < 1.2
- 최대방전전류 (Imax) : 20 kA (8/20 $\mu$ s)
- 대역폭 (Bandwidth) : 0 to several GHz
- 커넥터 종류 : N, BNC, TNC, 7/16, F, SMA, UHF, 7/8 cable.

제품 규격 (mm)

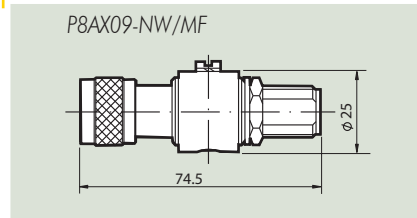

Part number

Référence CITEL	P8AX
Connectique F	P8AX..-F/MF P8AX..-F/FF
Connectique N	P8AX..-N/MF P8AX..-N/FF
Connectique BNC	P8AX..-B/MF P8AX..-B/FF
Connectique 7/16	P8AX..-7-16/MF P8AX..-7-16/FF
Connectique SMA	P8AX..-SMA/MF P8AX..-SMA/FF
Connectique TNC	P8AX..-T/MF P8AX..-T/FF
Connectique UHF	P8AX..-U/MF P8AX..-U/FF

P8AX Series 의 적용 예

- RF transmission
- GSM
- Radicom (방송국 및 통신 기지국)

제품 사양

CITEL series	P8AX
Technologie	Gas tube
적 용	Transmissions RF, GSM
대역폭 : Bandwidth (fmax)	0 to several GHz
삽입 손실 @ fmax	< 0,2 dB
TOS @ fmax	< 1,2
최대 피크 전압	25 W : P8AX09.. 190 W : P8AX25..
보호 레벨 (Up) @ In (onde 8/20 $\mu$ s)	< 600 V
공칭 방전 전류(In) 8/20 $\mu$ s - 10 impulses	20 kA
제품의 특징	- Material : brass - Amagnetic surface coating - Mounting : on frame
동작 온도	-40/+80°C